


T0505N Series

SPECIFICATIONS

Item	T0505N
Rated Voltage	DC 5V
Rated Current/Phase	260mA(RMS)
Coil DC Resistance	14Ω±10%
Step Angle	18°/step
Drive Method	Constant Voltage
Excitation Method	2-2 Phase excitation(Bipolar driving)
Insulation Class	Class E insulation
Pull-out Torque	1.5 g-cm/2400pps
Pull-in Torque	1.3 g-cm/2400pps
Max. Pull-out Pulse Rate	4000pps
Max. Pull-in Pulse Rate	2000pps

CHARACTERISTICS

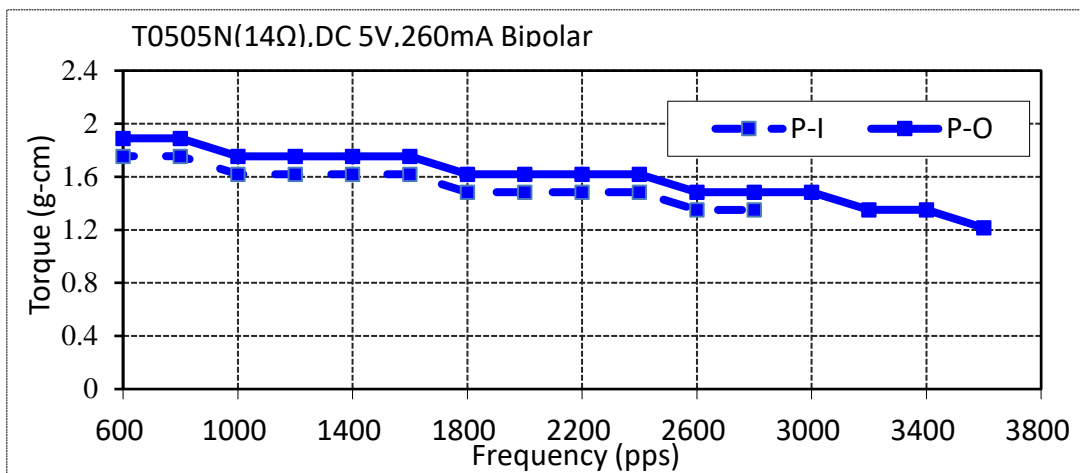

DIMENSIONS

