


# T3508 Series

## SPECIFICATIONS


Item	T3508F
1. Rated Voltage (V)	DC 5
2. Rated Current/Phase (mA/RMS)	130
3. Coil DC Resistance (Ohm)	8.8±10%
4. Step Angle (Degree)	7.5
5. Drive Mode	Constant Current
6. Excitation Method	2-2 Phase excitation(Bipolar driving)
7. Insulation Class	Class E
8. Pull-out Torque (g-cm/pps)	18/3000
9. Pull-in Torque (g-cm/pps)	35/100
10. Max. Pull-out Pulse Rate (pps)	6500
11. Max. Pull-in Pulse Rate (pps)	1500

## CHARACTERISTICS

T3508F(8.8Ω),DC 5V,130mA Bipolar

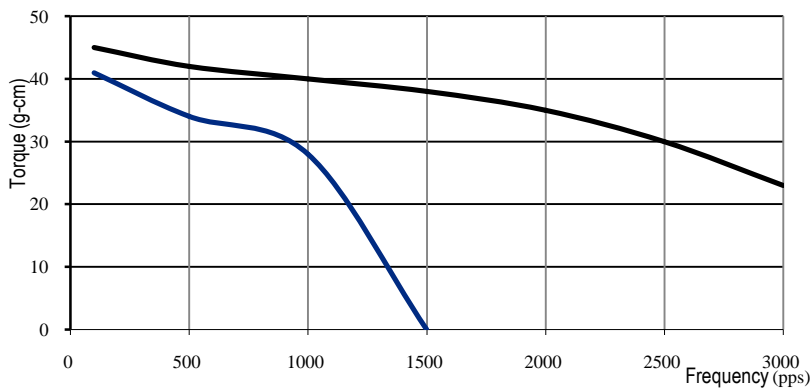

## DIMENSIONS

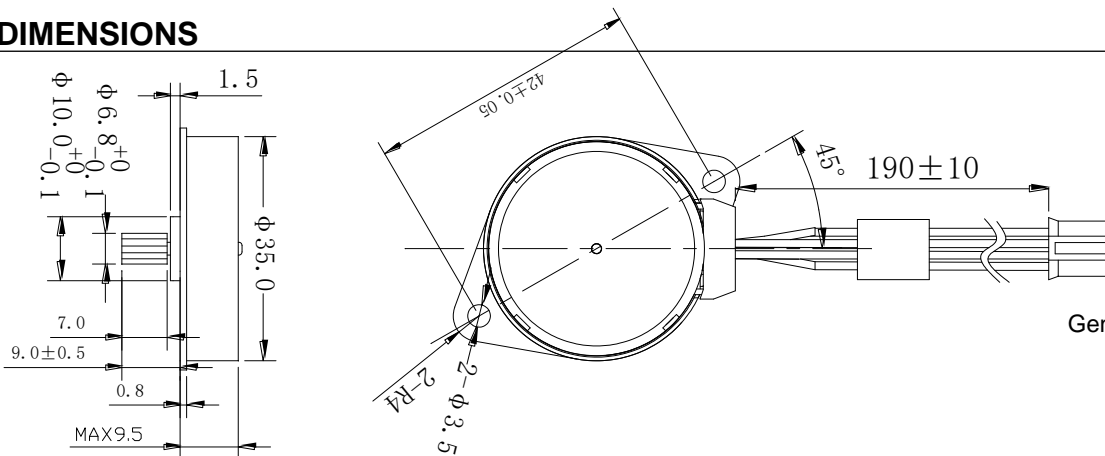

Unit: mm  
General Tolerance: ±0.1